

Bolidtin

F a i r s p e c i a l



INFORMATIE BULLETIN

van Bolidt kunststoftoepassing b.v.
Hendrik - Ido - Ambacht / Nederland

Boliscreed 400

Boliscreed 400 is a lightweight, waterimpermeable, flexible **levelling screed** for steel, wooden and cementitious substrates that withstands vibration and deflection without breaking or cracking.

The Boliscreed 400 has specially been developed to level uneven surfaces and can be finished with synthetic deckcoverings, vinyl, carpet, tiles etc.



Bolideck 1500

Bolideck 1500 is seamless, liquid applied resilient surfacing material. It has flexible properties which absorb small movements in the substrate without cracking or breaking. Moreover, the Bolideck 1500 has a good resistancy to acids lubricants, lyes, water, etc. Its surface is non-slip due to broadcasted granules. Suitable for sun decks, embarkation decks. Due to its good **impact** sound absorption properties it is often used as deckcovering above the cabins. It is also installed on i.e. the balconies, jogging deck, swimming pool decks.



Bolideck 525

Bolideck 525 is a seamlessly applied, skid resistant, sound- and shock-absorbing deckcovering system, for normal and heavy traffic areas. It is installed on top of a specially developed levelling screed, the Boliscreed LW. By means of this levelling layer the system is flexible enough to follow the movements of the steel without cracking. The system comes in a smooth surface and can be delivered in approx. 70 colours.



Bolideck 2000

Bolideck 2000 is a flexible, lightweight, **teak-like planking system**. It is highly suitable for flooring demanding a finished surface of high quality with excellent thermal and sound insulating properties and with excellent resistance to temperature extremes. Decorative deckfinish on outdoor deck areas like promenade decks, sun- and sportsdecks.

Bolideck 2002

Bolideck 2002 is a seamless applied, decorative floor finishing, combining highest quality polyurethane resins with specially selected types of decorative granules enabling patterns and colours to be varied almost endlessly. This qualitatively optimal floor can be used without problems in places of the highest demands in respect of resistance to shock, wear and/or chemicals. Specially suitable for **design floors**.



Bolideck Select

Bolideck Select is a **state-of-the-art** seamless, liquid applied, decorative floor finish. It contains flexible properties absorbing the small movements of the substrate without cracking. Since there is a big demand from the market for a lightweight, easy to clean/maintain product this system has been developed.

The Bolideck Select comes in a hard and soft finish. Therefore we distinguish:

- 1. Bolideck Select Soft**
- 2. Bolideck Select Hard**

The Bolideck Soft has better sound attenuation properties and is therefore recommended in areas where there are specific sound requirements.

In case very strong sound requirements are requested the Bolideck Select S.I. is recommended. This specially developed system is especially installed in areas above cabins.

Bolideck Select Teak Effect

This system has the same properties and characteristics as the Bolideck Select, but is installed with a teak-like finish.

Bolidt Swimming Pool System

This is a flexible seamlessly applied system on the inside of the swimming pools. Its flexible characteristics make that the system can follow the movements of the substrate without cracking. Moreover, this system can be installed in both a plain colour as well as with an "endless" design.

Bolidt Helideck

This deck is specially developed for the Helicopter Deck. This seamlessly installed system is a flexible system broadcast with specially selected aggregates. Due to this combination we are able to supply and install a system which is both technically and aesthetically very suitable as a helicopter deck.

Bolidt B1 system

The Bolidt B1 system is specially developed for the outdoor areas of frigates to meet their specific requirements. The seamless, strong and wear resistant Bolidt B1 System is applied where next to wear resistancy and surface friction also resistance to mechanical loads and protection of the substrate are important items. Through composition and choice of compatible layers an excellent corrosion resistancy is achieved.

The areas around the "Oto-Melara" and the "BOZ-positions" need special attention in order to withstand the additional usage. These areas can be covered with a special underlayer, the so-called "Anti Dreun Compound MK", enabling the decking to withstand the heavy loads coming into the decking.

Bolideck 700

The Bolideck 700 is a trowel applied epoxy screed with a terrazzo effect. The floor has an extremely high compression strength and is highly wear and tear resistant. Bolideck 700 is furthermore highly chemical resistant and can be cleaned with hot water and normal cleaning products. The floor surface is anti-slip. Especially suitable in wet areas. The Bolideck 700 is installed on top of the levelling layer Boliscreed LW.



Bolidt Galley Deck

This system is specially developed for the galleys. The Bolidt Galley Deck is a seamlessly applied system broadcast with aggregates ensuring the right anti-slip on the one hand and easy maintenance on the other. Moreover the special composition of the system makes this system both technically and aesthetically very suitable for galleys.



Cattledeck 3000

The Cattledeck 3000 **lightweight** ship deck system is based on solvent-free thermosetting synthetic resins and as the name suggests, has been specifically developed for cattle carriers. Cattledeck 3000 has a low percentage of fillers and can be dressed with meadow green-coloured quartz granulate, this together with the system's elasticity has proven to be highly beneficial to the well being of the livestock. The system is a seamless and liquid-tight deck providing mechanical resistance with excellent anti-slip and hard-wearing properties.

The Cattledeck 3000 system has superb adhesion qualities to both aluminium and steel decks as a result of its elasticity, which accommodates movement as well as expansion and contraction due to temperature changes. In addition to this it is also resistant to the effects of faeces, urine and to a wide range of organic acids, bases, and solvents.




Bolideck Synthetic Floor ET/NG

is a polymer based liquid trowel applied system, specially selected for carrying **cattle**. The system is finished with selected granules to provide a good non-slip and strong base for cattle to stand on.

Bolideck Synthetic Floor ET/SL

is a polymer based liquid applied deck finish, broadcast with non-slip aggregates to provide a good non-slip base for **sheep**. This system is less thick than ET/NG and broadcast with special quartzes.

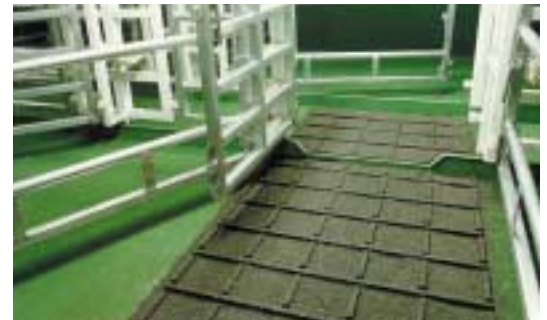

Bolidt Coating ET

is a polymer based coating system, which is being used to coat the **kicking plates** and **shipsides** for livestock transport vessels.

Bolideck Lightweight

is a specially developed system for the transport of livestock (**sheep**). Due to its **lightweight** characteristics it is frequently applied on the top decks. The system is broadcast with an anti-skid aggregate.



Bolidt Ballast Compound

Bolidt Ballast Compound exists of tough elastic polyurethane, highly filled with heavy fillers. The polyurethane is based on branched polyols and aromatic polyisocyanates and fillers, which have to be mixed into a perfectly homogeneous mass. Suitable as a ballast compound for keel, steering and other shipspaces.





Bolideck A60

is a **fire-insulating** lightweight floating floor. It provides total fire insulation on top of the steel/aluminium deck, thus avoiding the requirement for insulation materials under the steel deck. The system has an excellent compression strength, perfect wear and tear resistance and is completely impermeable to water.



Bolideck A60 SI

is a floating floor composed of a base of mineral wool with a high-density, fully synthetic, vapour-proof top-layer. This seamless system has been used in engine control room, engineer's office, crew day room, passageway, changing room, and sanitary rooms. It contains expanded metal reinforcement, which combines **optimum sound insulation** with fire retardancy, perfect wear and tear resistance.



Boliscreed LW

Boliscreed LW is a lightweight, waterimpermeable, flexible **levelling screed** for steel, wooden and cementitious substrates that withstands vibration and deflection without breaking or cracking. The Boliscreed LW has specially been developed to level uneven surfaces and can be finished with synthetic deckcoverings, vinyl, carpet, tiles etc.



Bolideck LT

The Bolideck LT system has been specifically developed for the cold storage and production areas on board of trawlers. After proper preparation of the steel decks, the decks are primed and after curing the first layer of the Bolideck LT system is applied, the Bolidt Grouting F. This is a waterproofing membrane that is developed to withstand the **extreme Low Temperatures** of the cold stores. On top of the membrane the toplayer of the system is applied to provide the deck with a very hard wearing and non-skid surface that can withstand the **heavy loaded pallet trucks** and the stacked pallets of deeply frozen fish.

F a i r s p e c i a l



Bolidt Synthetic Products & Systems, P.O. Box 131, 3340 AC H.I. Ambacht, The Netherlands.
Telephone 31(0)78-684 54 44, Telefax 31(0)78-684 54 98, e-mail export@bolidt.nl, www.bolidt.com

